
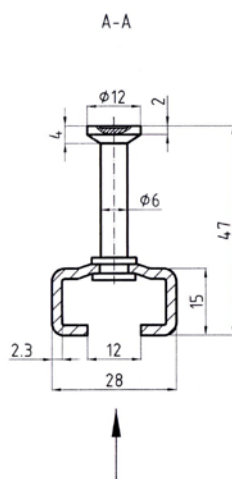


PROFILI A C CON CHiodO / ANCHOR CHANNEL



PROFILO TIPO	28 / 15
PROFILE TYPE	

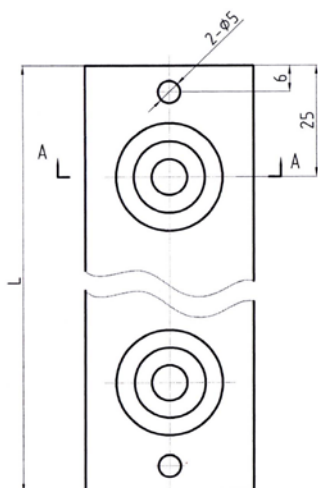

Mat.: St 37.2 Zincato a caldo Spess.0.045-0.055mm / St 37.2 Hot deep galvanized thickness 0.045-0.055mm

Codice/Code	Carico rott. Breaking load daN	Dim/Size mm	Lunghezza Length mm	N. Chiodi N. Anchor	Spessore thickness mm
84.0532	880	28/15	150	2	2.3
84.0533	880	28/15	200	2	2.3
84.0534	880	28/15	250	2	2.3
84.0535	880	28/15	300	2	2.3
84.0537	880	28/15	3000	15	2.3

T-Bolt


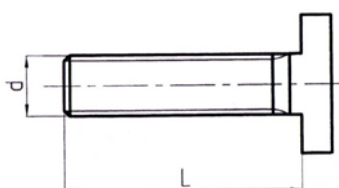


Cod.	Profilo tipo Profile type	d	L	b2
84.0571	28/15	M10	30	22.7
84.0572			40	

Mat.: St. 37.2 zincato bianco Spess. 0.005 mm
 St. 37.2 white zinc. plated Thickness 0.005 mm

PROFILI A C CON CHIODO / ANCHOR CHANNEL



PROFILO TIPO PROFILE TYPE	38 / 17
------------------------------	---------

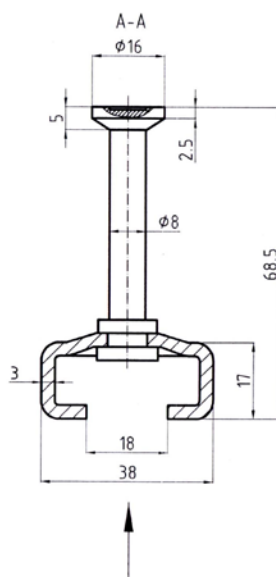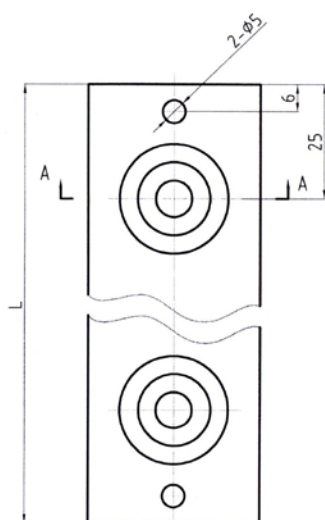

Mat.: St 37.2 Zincato a caldo Spess.0.045-0.055mm / St 37.2 Hot deep galvanized thickness 0.045-0.055mm

Codice/Code	Carico rott. Breaking load daN	Dim/Size mm	Lunghezza Length mm	N. Chiodi N. Anchor	Spessore thickness mm
84.0542	1750	38/17	150	2	3
84.0543	1750	38/17	200	2	3
84.0544	1750	38/17	250	2	3
84.0545	1750	38/17	300	2	3
84.0546	1750	38/17	350	3	3
84.0547	1750	38/17	3000	15	3

T-Bolt


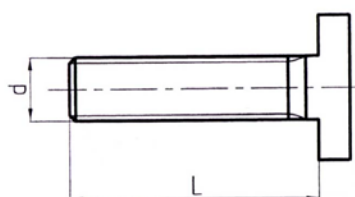


Cod.	Profilo tipo Profile type	d	L	b2
84.0573	38/17	M12	50	30.5
84.0574			60	
84.0575		M16	60	

Mat.: St. 37.2 zincato bianco Spess. 0.005 mm
St. 37.2 white zinc. plated Thickness 0.005 mm

PROFILI A C CON CHIEDO / ANCHOR CHANNEL


PROFILO TIPO	40 / 25
PROFILE TYPE	

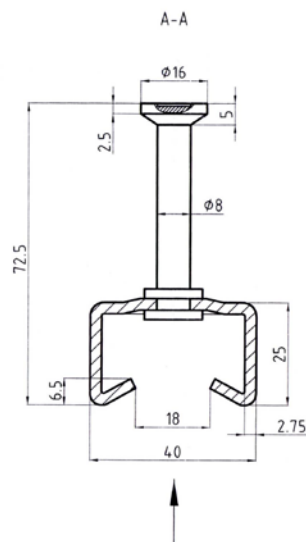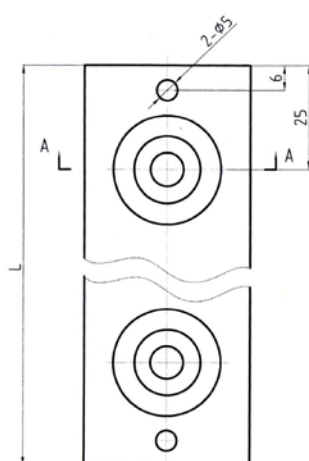

Mat.: St 37.2 Zincato a caldo Spess.0.045-0.055mm / St 37.2 Hot deep galvanized thickness 0.045-0.055mm

Codice/Code	Carico rott. Breaking load daN	Dim/Size mm	Lunghezza Length mm	N. Chiodi N. Anchor	Spessore thickness mm
84.0552	2000	40/25	150	2	2.75
84.0553	2000	40/25	200	2	2.75
84.0554	2000	40/25	250	2	2.75
84.0555	2000	40/25	300	2	2.75
84.0556	2000	40/25	350	3	2.75
84.0557	2000	40/25	3000	15	2.75

Hook-head-Bolt


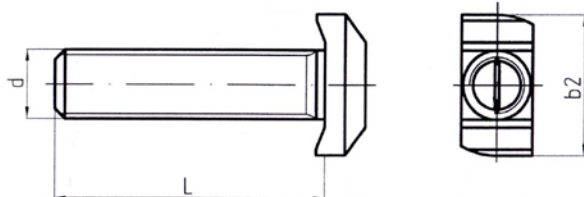


Cod.	Profilo tipo Profile type	d	L	b2
84.0576	40/25	M12	50	32.5
84.0577			60	
84.0578			80	
84.0579		M16	50	
84.0580			60	
84.0581			80	

Mat.: St. 37.2 zincato bianco Spess. 0.005 mm
 St. 37.2 white zinc. plated Thickness 0.005 mm

PROFILI A C CON CHiodO / ANCHOR CHANNEL



PROFILO TIPO	49 / 30
PROFILE TYPE	

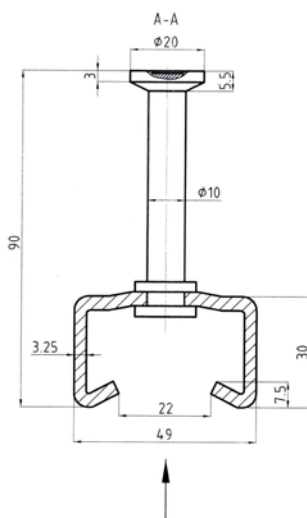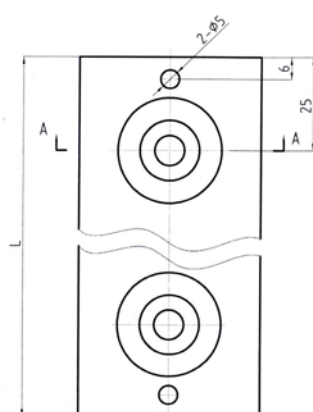

Mat.: St 37.2 Zincato a caldo Spess.0.045-0.055mm / St 37.2 Hot deep galvanized thickness 0.045-0.055mm

Codice/Code	Carico rott. Breaking load daN	Dim/Size mm	Lunghezza Length mm	N. Chodi N. Anchor	Spessore thickness mm
84.0562	3000	49/30	150	2	3.25
84.0563	3000	49/30	200	2	3.25
84.0564	3000	49/30	250	2	3.25
84.0565	3000	49/30	300	2	3.25
84.0567	3000	49/30	3000	15	3.25

Hook-head-Bolt

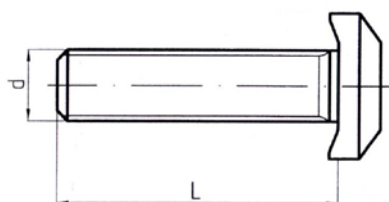

Cod.	Profilo tipo Profile type	d	L	b2
84.0582	49/30	M16	50	41
84.0583			60	
84.0584			80	
84.0585		M20	80	
84.0586			100	

Mat.: St. 37.2 zincato bianco Spess. 0.005 mm
 St. 37.2 white zinc. plated Thickness 0.005 mm